




 **DL03** is a recessed LED Downlight and provide a visual comfortable energy-efficient with a wide uniform general lighting solution, also ideal for use in under canopy or bathroom locations. Application areas: offices, receptions, hospitals, bathrooms, residential, hotels.

 **DL03** è un faretto da incasso a LED e fornisce una visuale confortevole ad alta efficienza energetica con una soluzione di illuminazione generale ampia e uniforme, ideale anche per l'uso in ambienti sotto tettoia o bagno. Settori di applicazione: uffici, reception, ospedali, bagni, residenziali, hotel.

TECHNICAL DATA

Type	Recessed
Installation	Indoor
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Opal Polycarbonate
Beam Angle	Wide
Emergency Unit	On request
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

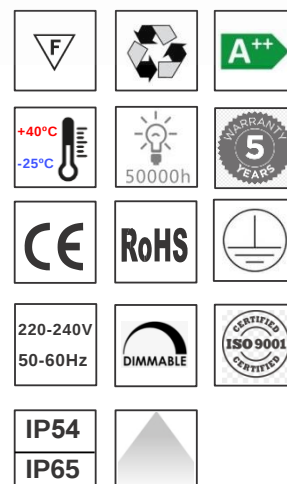





LA LUCE

LIGHT - DESIGN - MORE

MODEL CODE

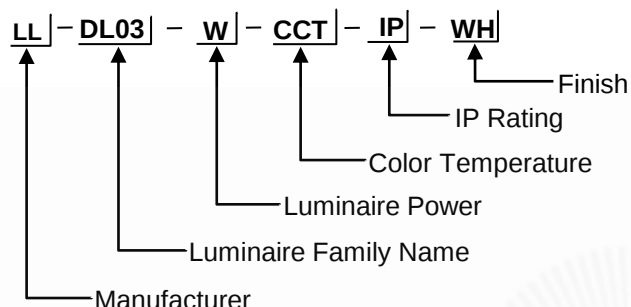

COLOR TEMPERATURE



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 6	672	112	>90
☐ 8	896	112	>90
☐ 10	1120	112	>90
☐ 13	1456	112	>90
☐ 15	1680	112	>90
☐ 18	2016	112	>90
☐ 20	2240	112	>90
☐ 24	2688	112	>90
☐ 25	2800	112	>90
☐ 30	3360	112	>90

CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 On/Off



FINISH OPTION



LED CHIPS

OSRAM

CREE

TRIDONIC

TCIE

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS

MEAN WELL

TRIDONIC

EAGLE RISE

LA LUCE

TCIE

PHILIPS

Helvar

OSRAM



more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

PHOTOMETRIC

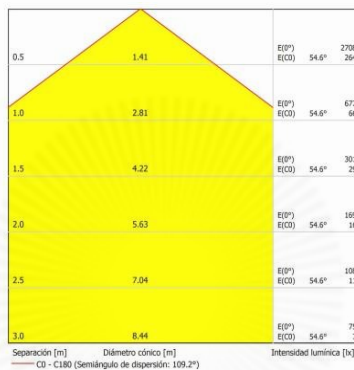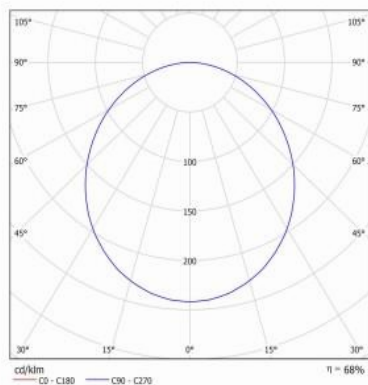

3D MODULE

