





 **DL03** is Outstanding lighting fixture and provides a consistent ceiling appearance whilst the square spot slot provides the maximum adjustment in this type of small fixture. Application areas: bathrooms, residential, museums, retail, hotels.

 **DL03** è un apparecchio di illuminazione eccezionale e fornisce un aspetto coerente del soffitto, mentre lo slot quadrato offre la massima regolazione in questo tipo di piccolo apparecchio. Aree di applicazione: bagni, residenziale, musei, retail, hotel.

TECHNICAL DATA

Type	Downlight
Installation	Recessed Downlight
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	PC diffuser
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed/Adjustable

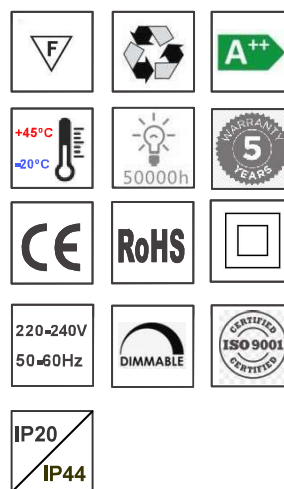




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

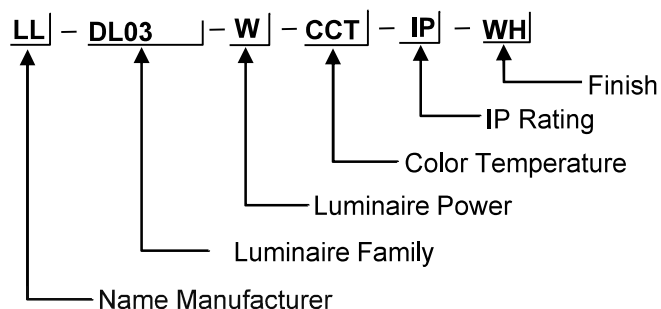

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ DL03-5W	5	500	100	>90
☐ DL03-7W	7	700	100	>90
☐ DL03-10W	10	1000	100	>90
☐ DL03-12W	12	1200	100	>90
☐ DL03-15W	15	1500	100	>90

COLOR TEMPERATURE

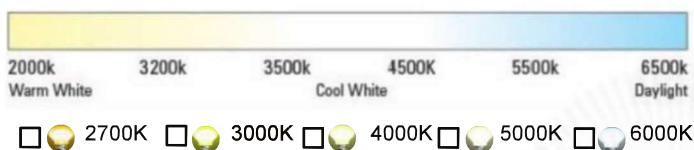

BEAM ANGLE OPTION



FINISH OPTION



CONTROL OPTION

- ☐ **D0** ON/OFF
- ☐ **D1** 0-10V DIM
- ☐ **PD** Phase Cut DIM



LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
Advancing Light and Color

NICHIA


LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it

PHOTOMETRIC

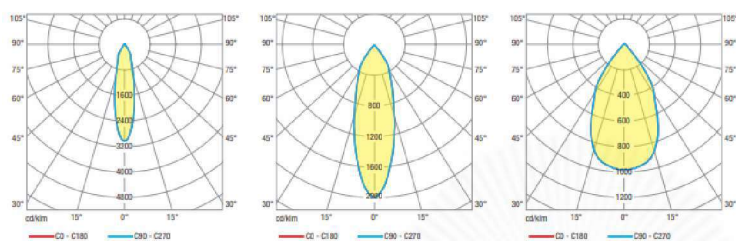

DIMENSION

