





 **SQDN02** is a surface Ceiling-mounted luminaire wire to the base with a **pluggable** connection for easy installation of different wattage, lumen, beam angle, CRI, and CCT option.

 **SQDN02** è un apparecchio per montaggio a soffitto di superficie, cavo alla base con una connessione a innesto per una facile installazione di diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

## TECHNICAL DATA

|                                             |                       |
|---------------------------------------------|-----------------------|
| Type                                        | Square Downlight      |
| Installation                                | Surface               |
| Housing                                     | Die-cast Aluminum     |
| Processing                                  | Powder Coated         |
| Diffuser                                    | Tempered Safety Glass |
| Light Emission Direction                    | Symmetrical           |
| Glow wire test                              | 850°                  |
| Safety Class                                | I                     |
| Direct Mounting on Normal Flammable Surface | Yes                   |
| Driver Included                             | Built-in              |
| Adjustable                                  | Fixed                 |

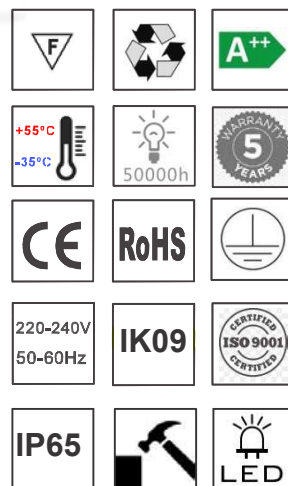




# LA LUCE


LIGHT - DESIGN - MORE

## ORDERING CODE

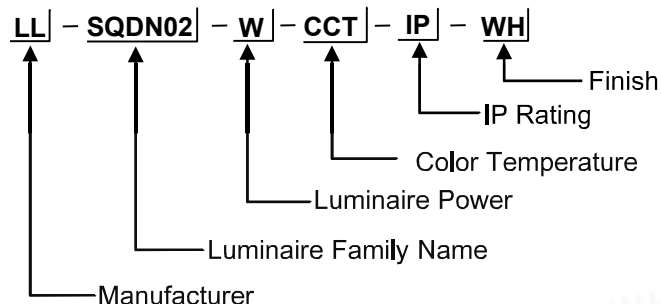

| Code No.                                   | System Power (W) | Lumen Output (lm) | Luminaire Efficacy (lm/W) | CRI           |
|--------------------------------------------|------------------|-------------------|---------------------------|---------------|
| <input type="checkbox"/> SQDN02-5W         | 5                | 500               | 100                       | >90           |
| <input type="checkbox"/> SQDN02-7W         | 7                | 700               | 100                       | >90           |
| <input type="checkbox"/> SQDN02-9W         | 9                | 900               | 100                       | >90           |
| <input type="checkbox"/> SQDN02-12W        | 12               | 1200              | 100                       | >90           |
| <input type="checkbox"/> SQDN02-14W        | 14               | 1400              | 100                       | >90           |
| <input type="checkbox"/> SQDN02-16W        | 16               | 1600              | 100                       | >90           |
| <input type="checkbox"/> SQDN02-18W        | 18               | 1800              | 100                       | >90           |
| <input type="checkbox"/> SQDN02-20W        | 20               | 2000              | 100                       | >90           |
| <input type="checkbox"/> SQDN02-22W        | 22               | 2200              | 100                       | >90           |
| <input type="checkbox"/> <b>SQDN02-25W</b> | <b>25</b>        | <b>2500</b>       | <b>100</b>                | <b>&gt;90</b> |

## COLOR TEMPERATURE OPTION



☐ 2700K   ☐ **3000K**   ☐ 4000K   ☐ 5000K   ☐ 6000K

## BEAM ANGLE OPTION

☐ 15°   ☐ 24°   ☐ 36°   ☐ 40°   ☐ 60°   ☐ **DIFFUSED**

## FINISH OPTION

☐ **SS**-Stainless Steel   ☐ **AL**-Aluminum   ☐ **GR**-Grey

## CONTROL OPTION

☐ DD      DALI DIM     

☐ D1      0-10V DIM     


☐ PD      Phase Cut DIM     

☐ OI      On / Off

## LED CHIPS



more information in [www.la-luce.it](http://www.la-luce.it)



# LA LUCE

LIGHT - DESIGN - MORE

## LED DRIVERS



TRIDONIC



DONE





Helvar

PHILIPS

OSRAM



## PHOTOMETRIC

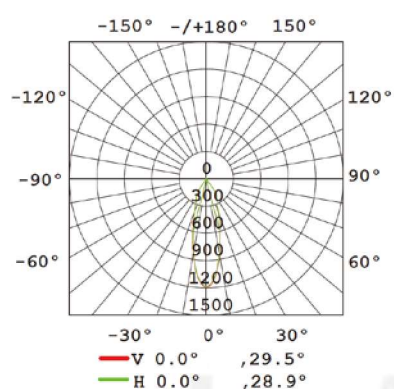

## 3D MODULE

