
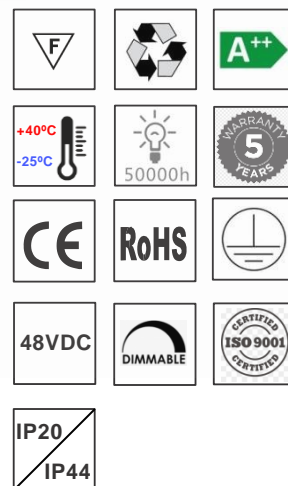

 **TRL70** is a Magnetic LED track luminaire with a wide range of uses – for the lighting of specific objects in commercial, retail, and public spaces, galleries, and showrooms with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **TRL70** è un apparecchio a binario magnetico a LED con un'ampia gamma di usi: per l'illuminazione di oggetti specifici in spazi commerciali, negozi e spazi pubblici, gallerie e showroom con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Track Light
Installation	Surface/Suspended/Recessed
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Yes






LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

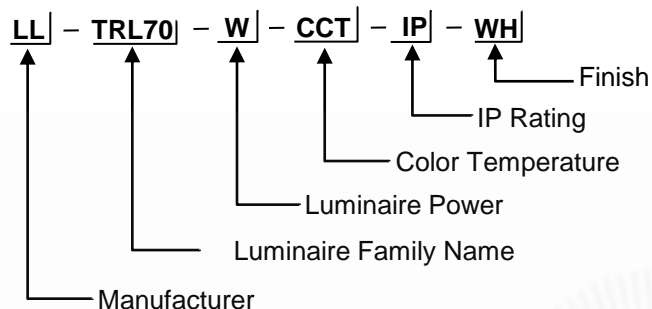

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> TRL70-15W	15	1500	100	>90
<input type="checkbox"/> TRL70-18W	18	1800	100	>90
<input type="checkbox"/> TRL70-25W	20	2000	100	>90
<input type="checkbox"/> TRL70-35W	28	2800	100	>90
<input type="checkbox"/> TRL70-45W	30	3000	1200	>90

COLOR TEMPERATURE

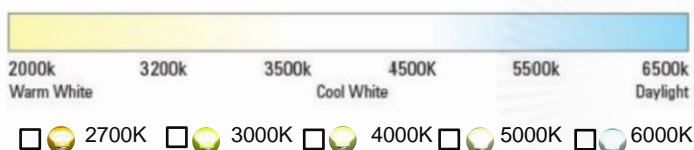

BEAM ANGLE OPTION

☐ 10° ☐ 15° ☐ 24° ☐ 30° ☐ 36° ☐ 60°



FINISH OPTION



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux


NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

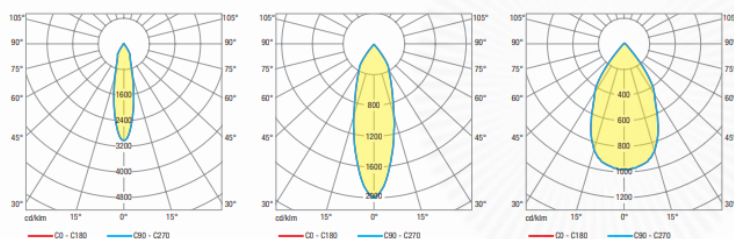

DIMENSION

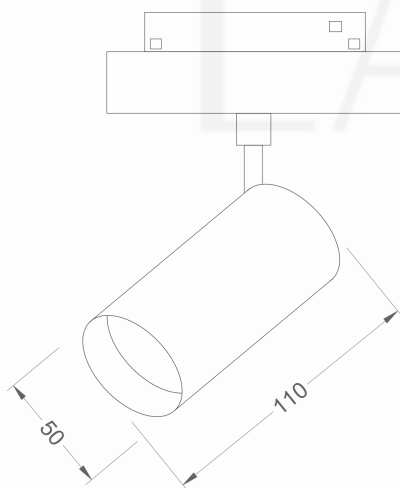


Image:



TECHNICAL DATA

Type	Recessed Track
Installation position	Ceiling
Installation environment	Indoor

FINISHING CASING

Material	Aluminum
Frame Colour	White / Black
Processing	Spray Paint

ACCESSORIES



QDT-36

Driver-track electric
connector



LJT36

track connector



ZTJBQ36

180° Track electric
connector



LJP36

Track cover connector



ZJJBQ36


90° Track electric
connector




Strings

hinging sets

1 PREINSTALLATION

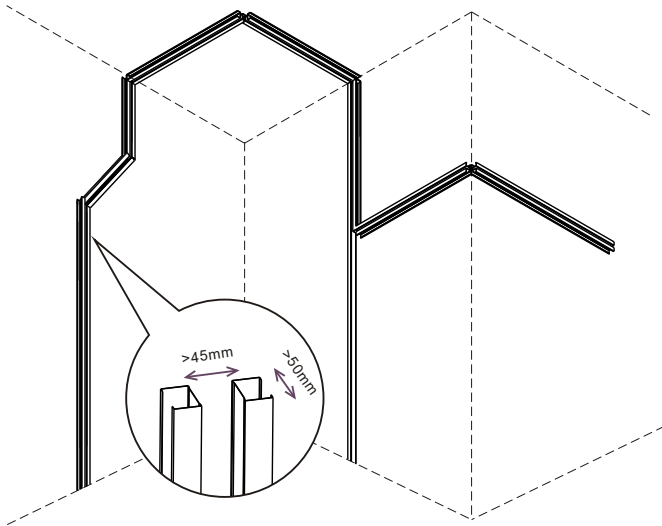

2 Take out


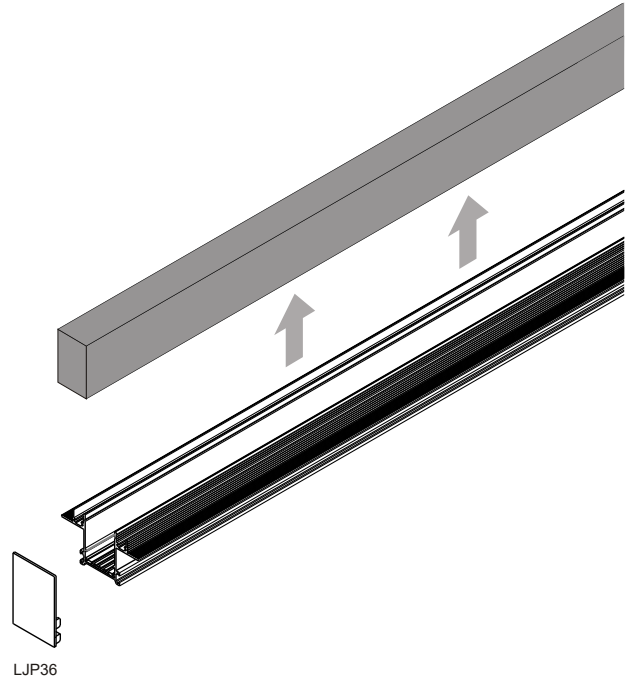






3 It is recommended to install the power supply next to the power box or the maintenance port.

4




WARNING:
It can be cut to length
and angle you want



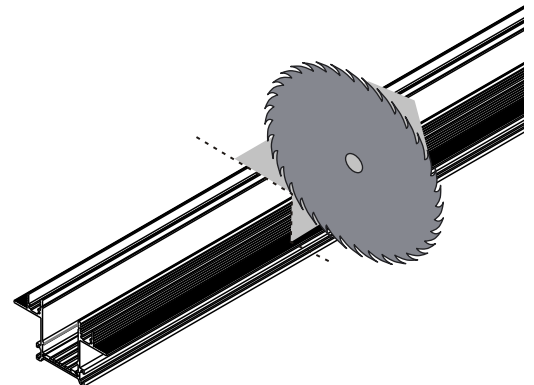
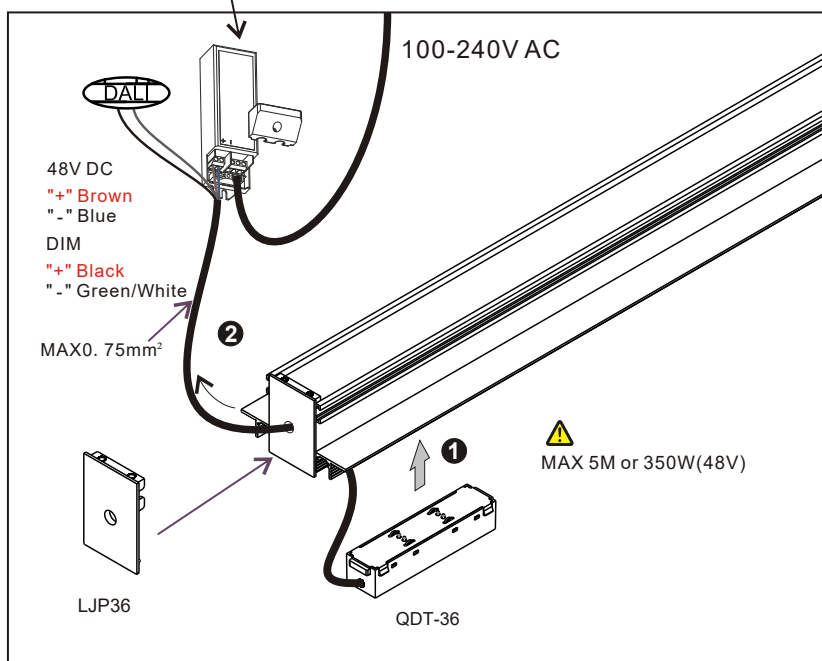


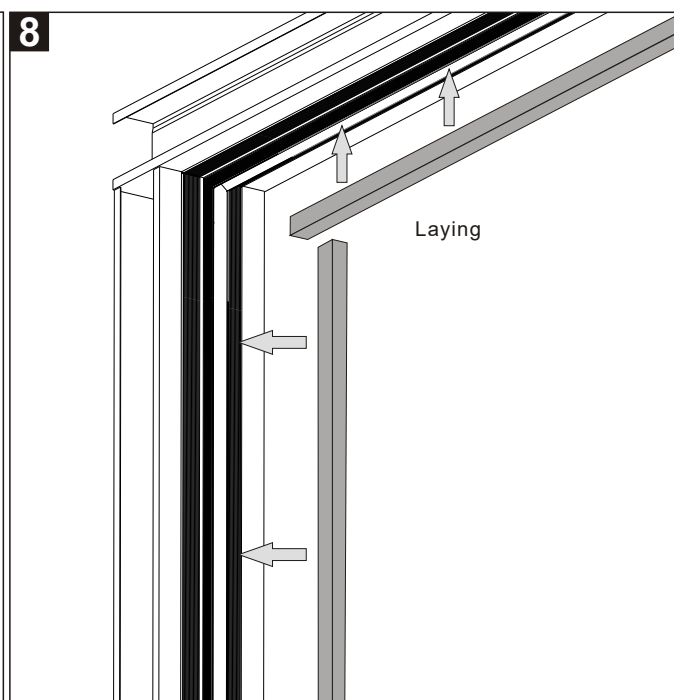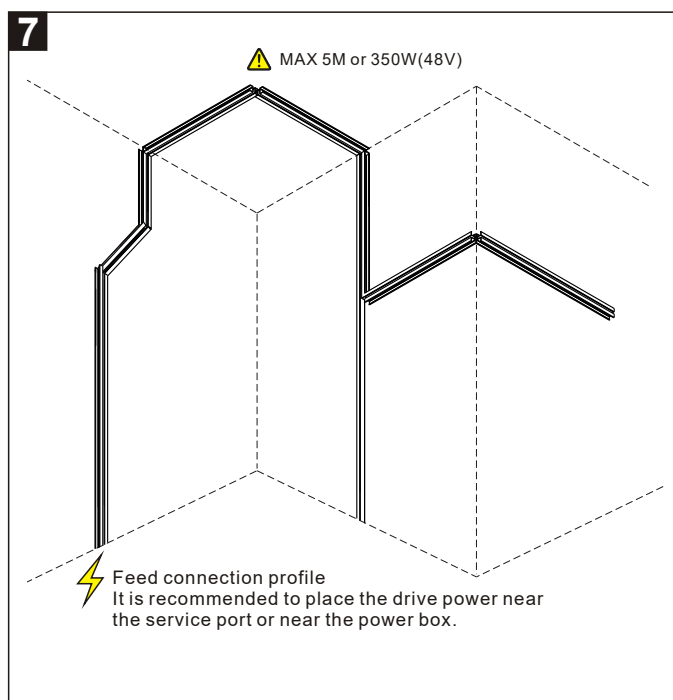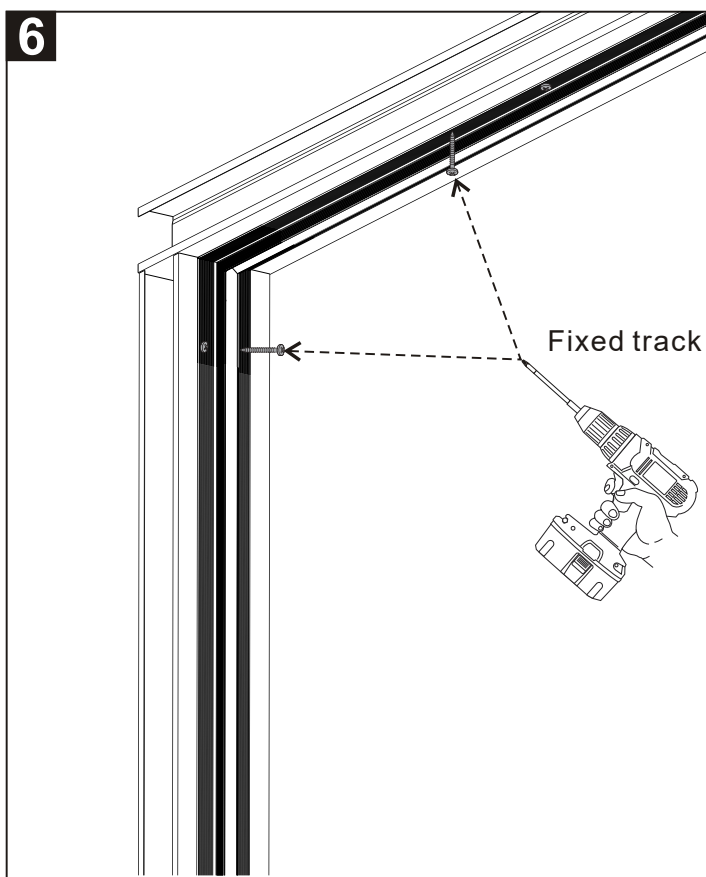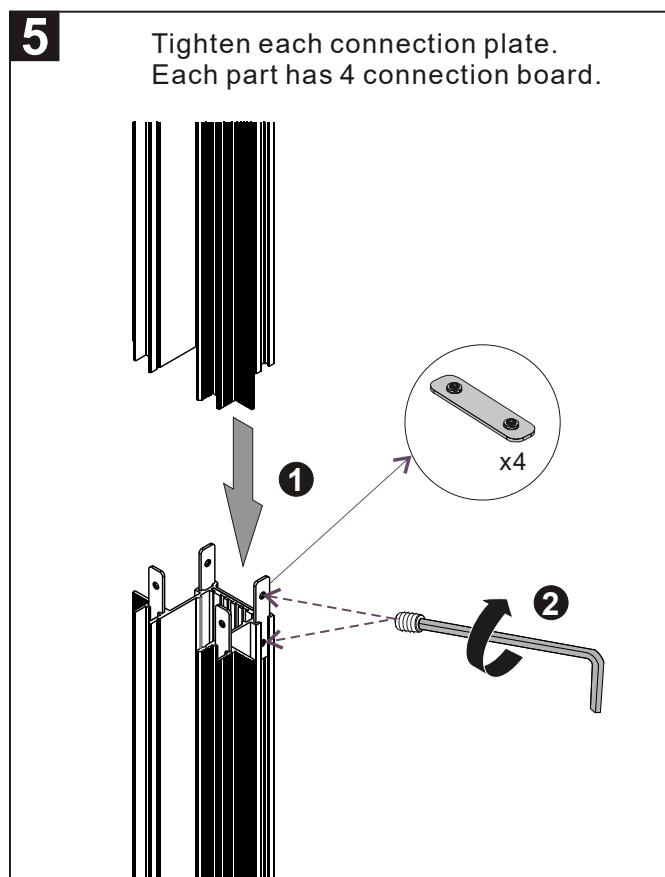



9

Laying planks and Lock screw.
Sheet thickness is 12mm.

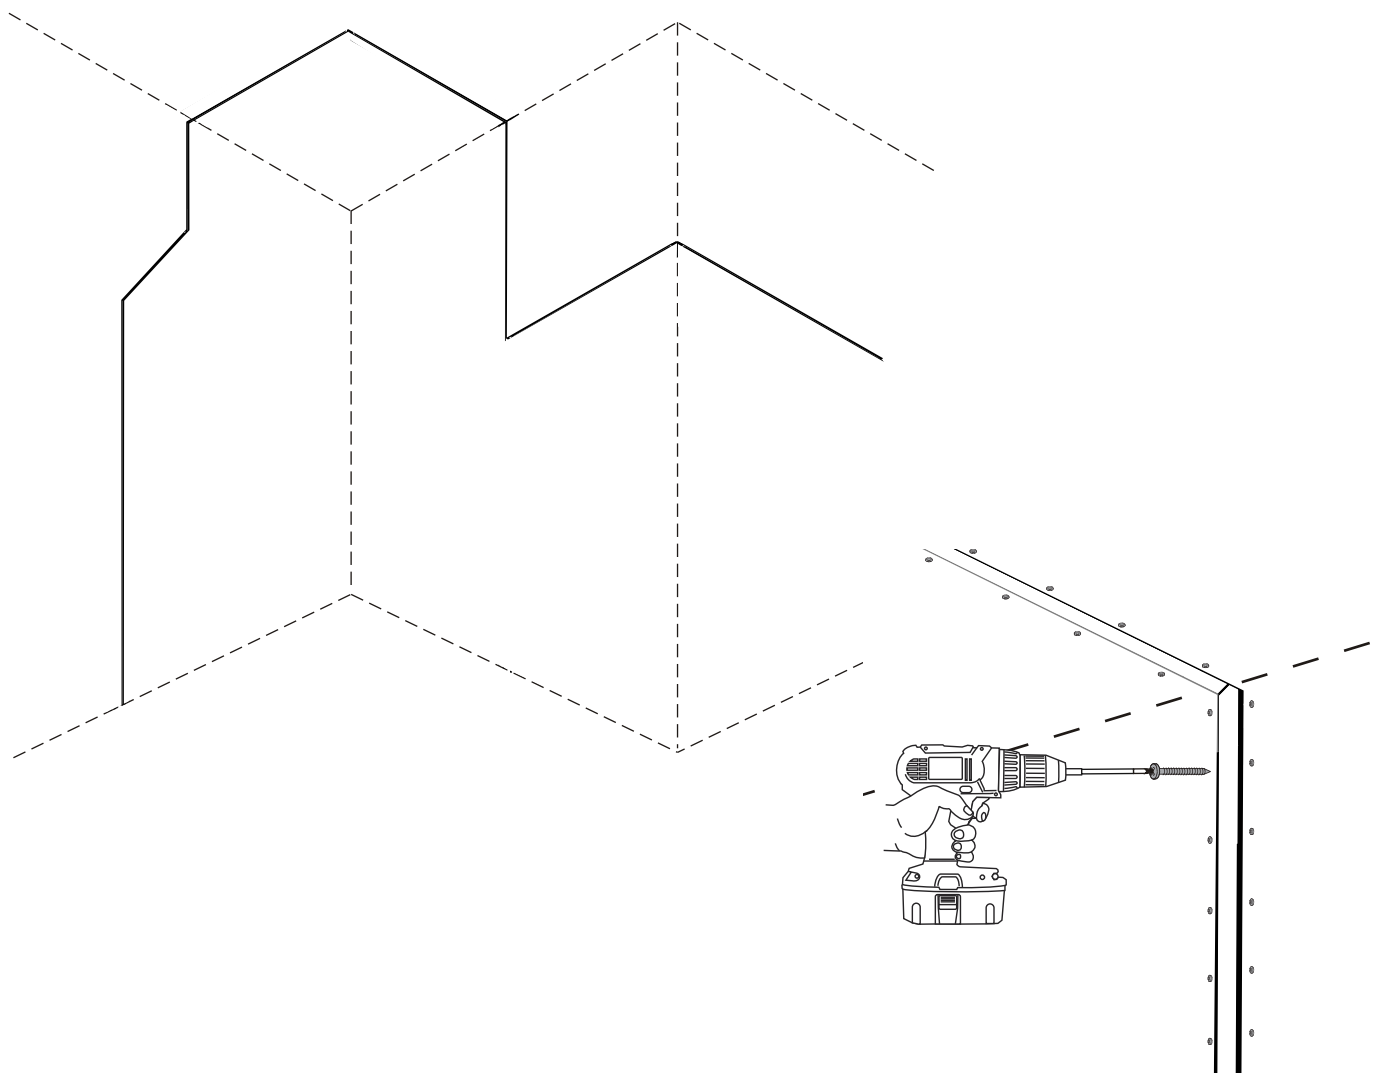

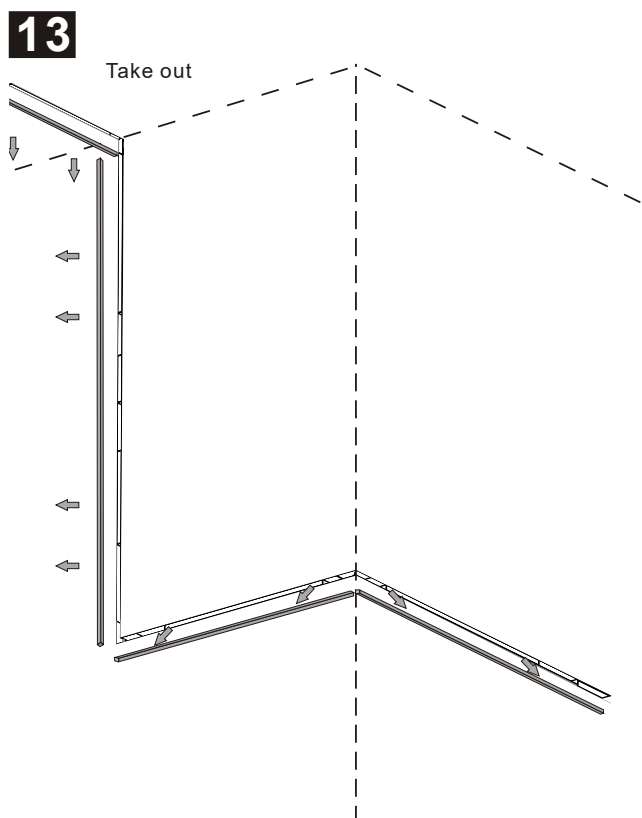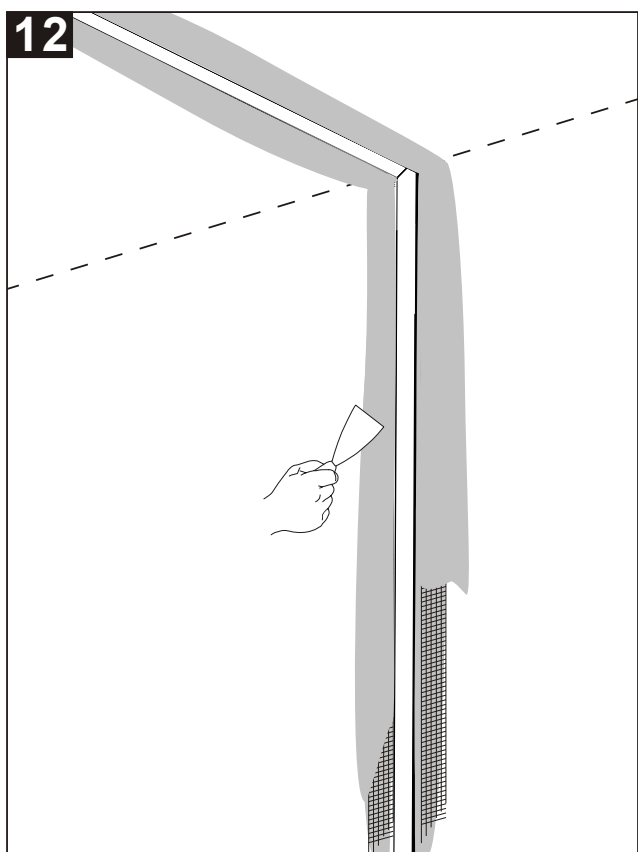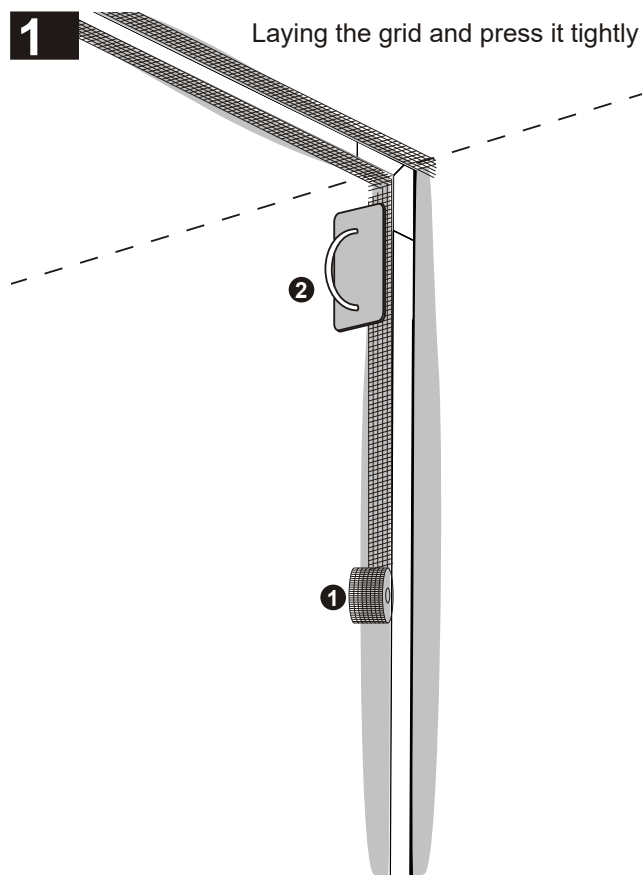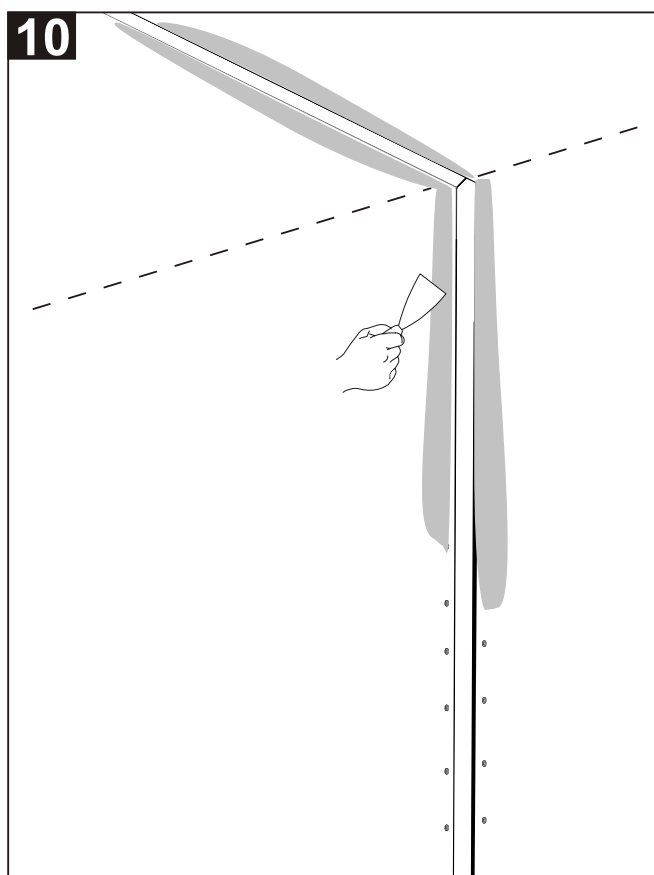

14

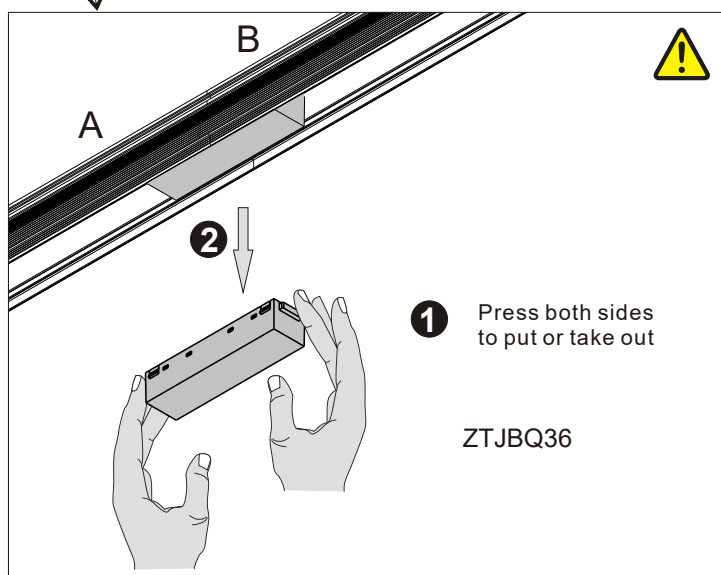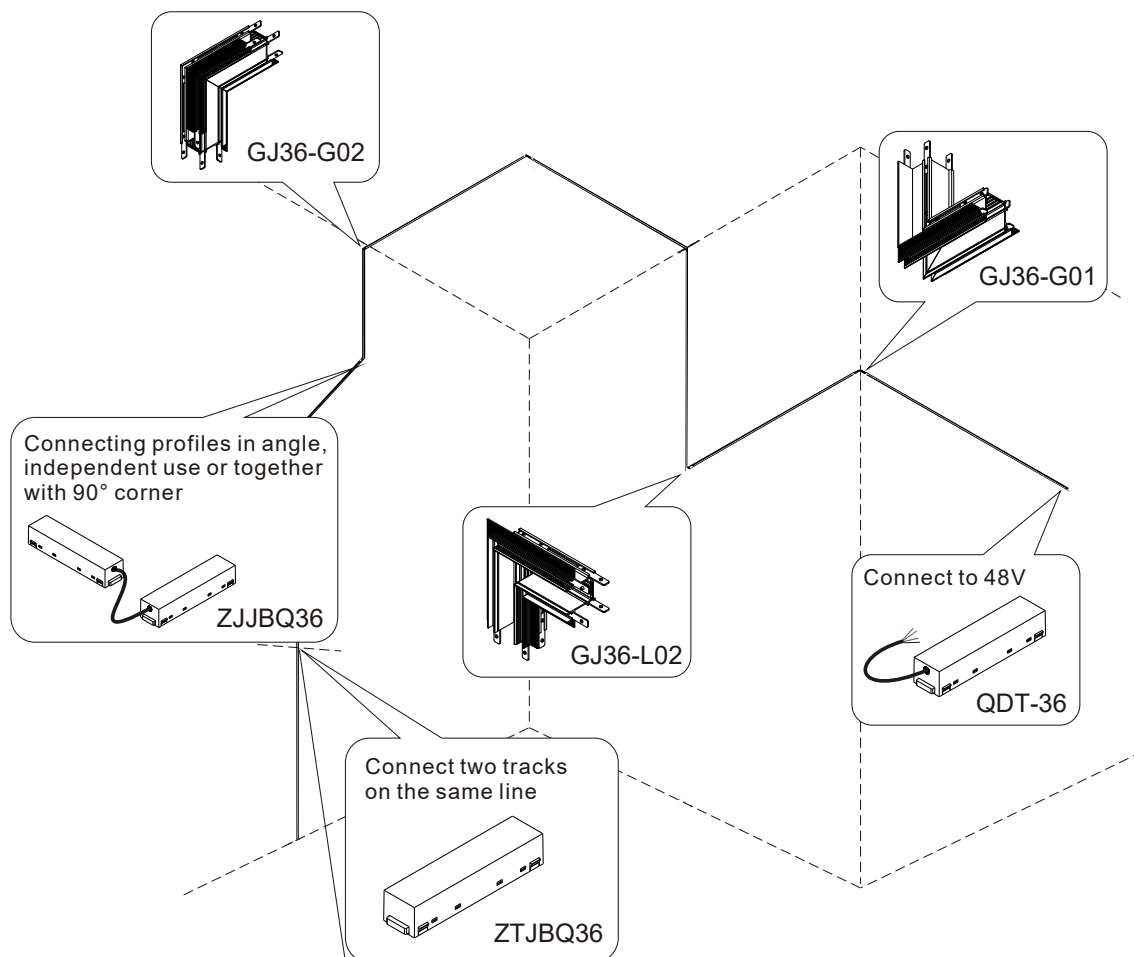

15

