
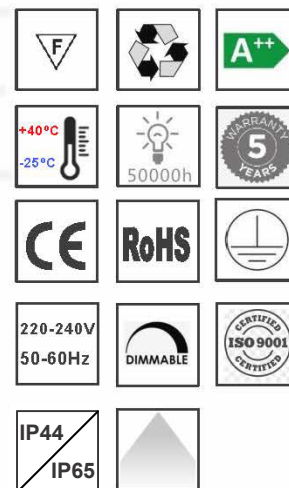

 **CLD90** is a surface downlight with an opal or clear polycarbonate diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation, with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **CLD90** è un downlight di superficie con diffusore in policarbonato opale o trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Downlight
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote/Built-in
Adjustable	Fixed






LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

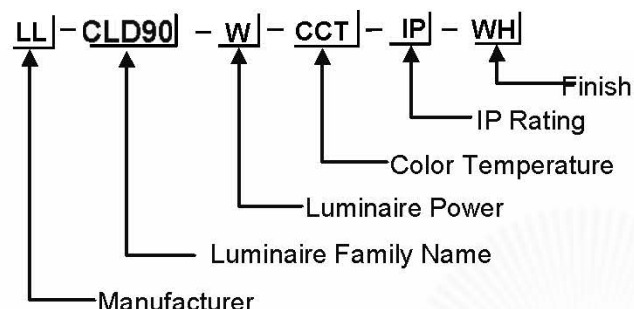

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> 6	720	120	>90
<input type="checkbox"/> 8	960	120	>90
<input type="checkbox"/> 10	1200	120	>90
<input type="checkbox"/> 12	1440	120	>90
<input type="checkbox"/> 15	1800	120	>90

COLOR TEMPERATURE



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 30° ☐ 38° ☐ 45° ☐ 60°



FINISH OPTION



☐ WH-White ☐ BR-Black ☐ GO-Gold ☐ CH-Chrome ☐ NI-Nickel

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCLED
professional led applications

bridgelux
a philips lighting company

LUMILEDS



LA LUCE

LIGHT DESIGN UNDER

LED DRIVERS



TRIDONIC



DONE




TC10

Helvar





OSRAM

PHOTOMETRIC

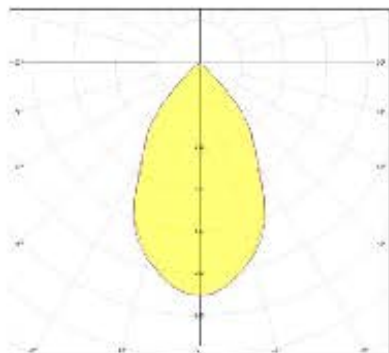

Ø90



Ø90

100-200