

LA LUCE

LIGHT - DESIGN - MORE

## WALL UP/DOWN LIGHT




 **WL02** is the irradiation angle can be adjusted manually Mounting different locations with the products, put multiple splice angle, makes different lighting effects, using your imagination, kinds of radius shape frames, variety of colors. Users can change the frame freely.


 **WL02** è l'angolo di irradiazione che può essere regolato manualmente Montando posizioni diverse con i prodotti, inserendo più angoli di giunzione, realizzando diversi effetti di luce, usando la tua immaginazione, tipi di cornici a forma di raggio, varietà di colori. Gli utenti possono cambiare la cornice liberamente.

### TECHNICAL DATA

|                                             |                     |
|---------------------------------------------|---------------------|
| Type                                        | Wall Mounted        |
| Installation                                | Surface             |
| Housing                                     | Die-cast Aluminium  |
| Processing                                  | Powder Coated       |
| Diffuser                                    | Clear Polycarbonate |
| Light Emission Direction                    | Symmetrical         |
| Glow wire test                              | 850°                |
| Safety Class                                | II                  |
| Direct Mounting on Normal Flammable Surface | Yes                 |
| Driver Included                             | Built-In            |
| Adjustable                                  | No                  |

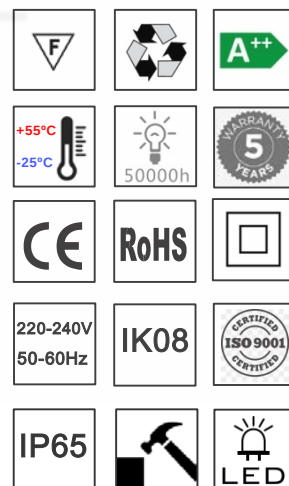


more information in [www.la-luce.it](http://www.la-luce.it)



# LA LUCE


LIGHT - DESIGN - MORE

## MODEL CODE

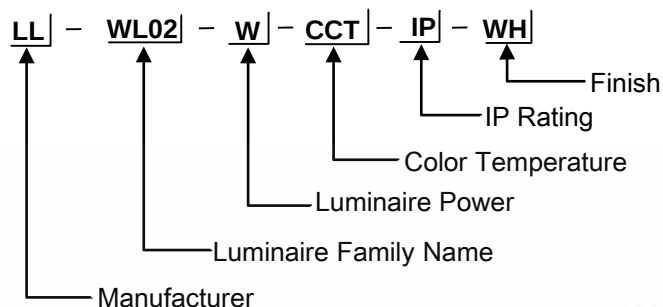

| System Wattage (W)            | Lumen Output (lm) | Luminaire Efficacy (lm/W) | CRI |
|-------------------------------|-------------------|---------------------------|-----|
| <input type="checkbox"/> 2x3  | 2x320             | 107                       | >90 |
| <input type="checkbox"/> 2x7  | 2x750             | 107                       | >90 |
| <input type="checkbox"/> 2x8  | 2x850             | 107                       | >90 |
| <input type="checkbox"/> 2x10 | 2x1070            | 107                       | >90 |

## COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

## BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Adjustable



## FINISH OPTION



☐ NI-  
Nickel



☐ WH-  
White



☐ GR-  
Grey



☐ BR-  
Black

## CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

## LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic


bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



# LA LUCE

LIGHT - DESIGN - MORE

## LED DRIVERS



TRIDONIC



DONE




TCI<sup>LED</sup>  
professional led applications

PHILIPS

Helvar

OSRAM

## PHOTOMETRIC

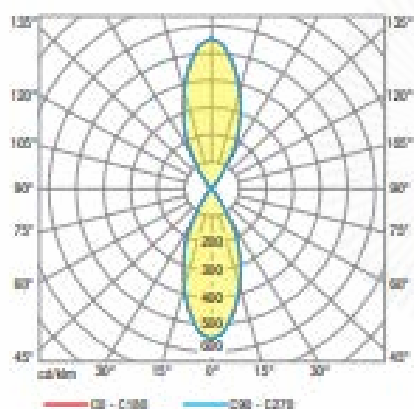

## 3D MODULE

