






 **WSC11** is a recessed LED wall light, producing a clearly defined wash of light. Adapted to illuminate ground surfaces with the downward orientation of light with different size, wattage, lumen, beam angle, CRI, and CCT option.

 **WSC11** è una lampada da parete a LED da incasso, che produce un fascio di luce chiaramente definito. Adattato per illuminare le superfici del terreno con l'orientamento verso il basso della luce con diverse dimensioni, potenza, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Wall Light
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes

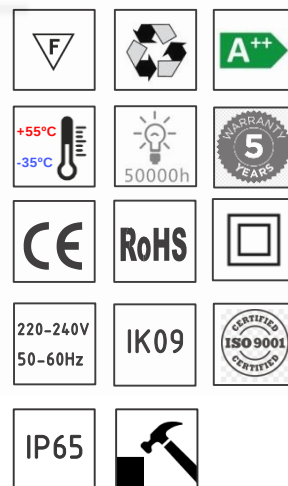




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

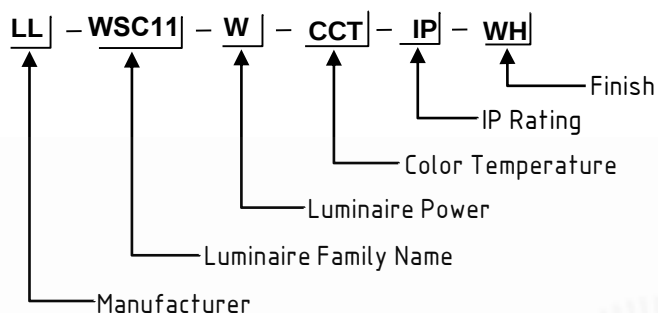

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WSC11-1.5W	1.5	135	90	>90
☐ WSC11-2W	2.0	180	90	>90
☐ WSC11-3W	3.0	270	90	>90
☐ WSC11-4W	4.0	360	90	>90
☐ WSC11-5W	5.0	450	90	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ Asymmetric



FINISH OPTION



☐ BL-Black

☐ AL-Aluminum

☐ GR-Grey

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCLED

bridgelux

LUMILEDS

more information in www.la-luce.it



OSRAM

Diagram illustrating the beam diameter and height for a beam angle of 69.9°.

Height (m)	Beam Diameter (m)	Beam Diameter (mm)
0.0m	105.4821x / 146.941x	0.00%
1.0m	35.0931x / 96.0961x	1.974m
1.0m	11.4981x / 16.2091x	3.061x
2.0m	6.4991x / 9.1481x	3.740x
5.0m	3.9741x / 4.0691x	4.129x

Beam Angle: 69.9°

Diameter: 105.4821x / 146.941x

