


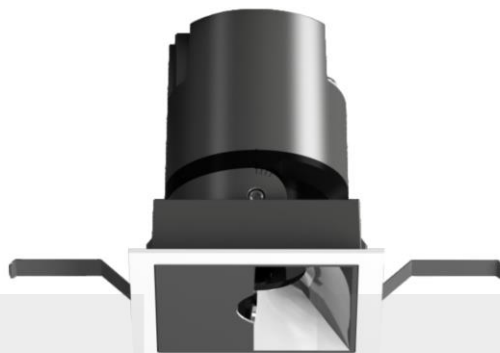


 **ROCASDF** is a recessed LED Downlight with a clear glass diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.


 **ROCASDF** è un faretto da incasso a LED con un diffusore in vetro trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed

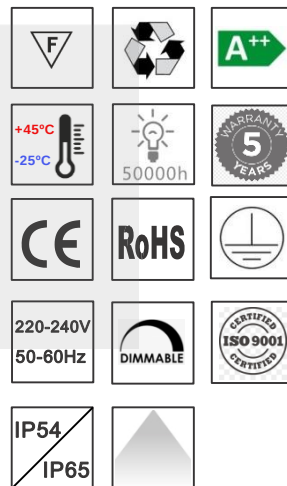


MODEL CODE

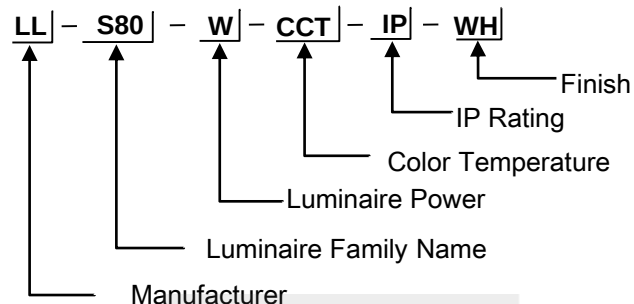


	System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐	5	500	100	>90
☐	7	700	100	>90
☐	8	800	100	>90
☐	9	900	100	>90
☐	10	1000	100	>90
☐	12	1200	100	>90
☐	14	1400	100	>90
☐	15	1500	100	>90

COLOR TEMPERATURE OPTION

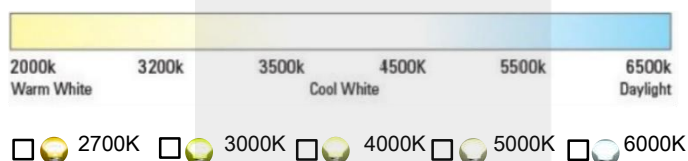

BEAM ANGLE OPTION

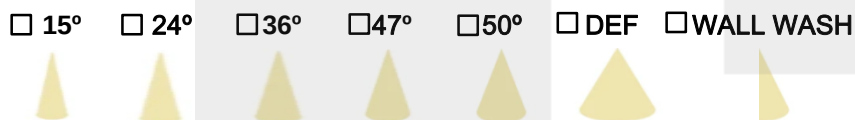

CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 On/Off

FINISH OPTION



LED CHIPS



LED DRIVERS



TRIDONIC



DONE




TCI LED
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

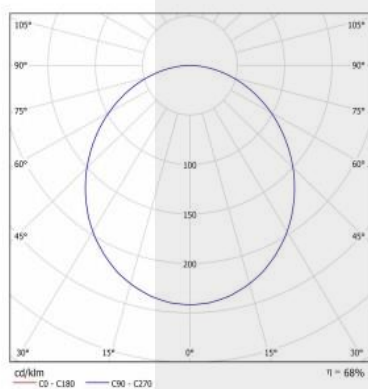

Separación [m]	Diámetro cónico [m]	Intensidad luminica [lx]
0.5	1.41	E(0°) 2708 E(C90) 54.6° 264
1.0	2.81	E(0°) 677 E(C90) 54.6° 66
1.5	4.22	E(0°) 301 E(C90) 54.6° 29
2.0	5.63	E(0°) 189 E(C90) 54.6° 18
2.5	7.04	E(0°) 108 E(C90) 54.6° 11
3.0	8.44	E(0°) 75 E(C90) 54.6° 7

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]
C90 - C180 (Semángulo de dispersión: 109.2°)

DIMENSION

