



 **PDLS/SL** is a slim surface LED wall/ceiling light-producing clearly defined symmetric of light. Adapted to illuminate ground surfaces with a wide beam of light and different sizes, wattage, lumen, CRI, and CCT options.

 **PDLS/SL** è una lampada LED da parete / soffitto a superficie sottile che produce una luce simmetrica chiaramente definita. Adattato per illuminare le superfici del terreno con un ampio fascio di luce e diverse opzioni di dimensioni, potenza, lumen, CRI e CCT.

TECHNICAL DATA

Type	Ceiling Mounted
Installation	Surface
Housing	Die cast Aluminum
Processing	Powder Coating
Diffuser	Polycarbonate Opal
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Adjustable	No






LA LUCE


LIGHT - DESIGN - MORE

MODEL

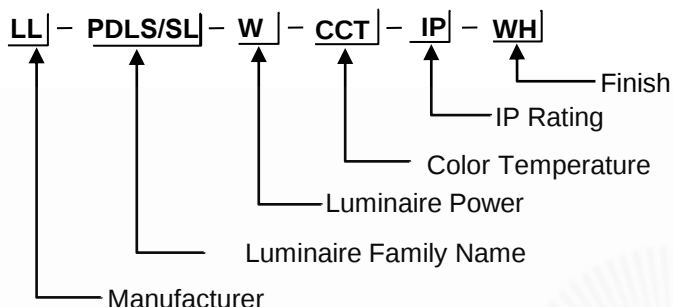

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 6	720	120	>90
☐ 8	960	120	>90
☐ 10	1200	120	>90
☐ 12	1440	120	>90
☐ 16	1920	120	>90
☐ 18	2160	120	>90
☐ 20	2400	120	>90
☐ 24	2880	120	>90
☐ 25	3000	120	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☐ WIDE



FINISH OPTION



☐ WH-White



☐ GR-Grey



☐ BR-Black

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLE RISE

LA LUCE

TCI LED

PHILIPS


more information in www.la-luce.it




LA LUCE

LIGHT - DESIGN - MORE

PHOTOMETRIC

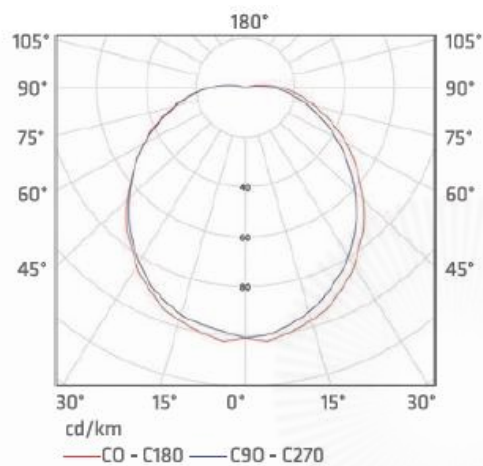

3D MODULE



LIGHT - DESIGN - MORE