





 **SPSL** is a surface LED Downlight with a clear glass diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **SPSL** è un faretto da incasso a LED con un diffusore in vetro trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari eintonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Surface Downlight
Installation	Surface Mounted
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Safety Glass with Special Anti Glare Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	No

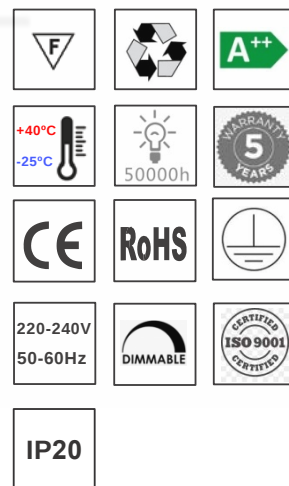




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

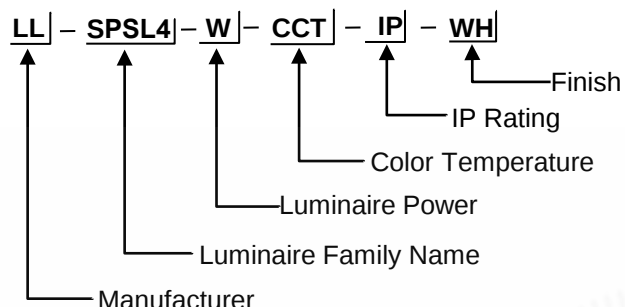

	System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐	8	800	100	>90
☐	9	900	100	>90
☐	12	1200	100	>90
☐	15	1500	100	>90

COLOR TEMPERATURE

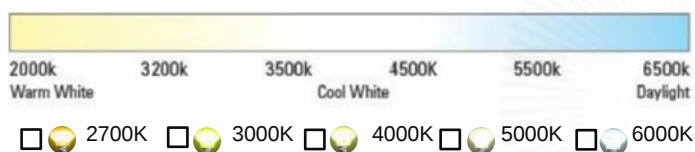

BEAM ANGLE OPTION

☐ 15° ☐ 18° ☐ 24° ☐ 30° ☐ 45° ☐ 60°



FINISH OPTION



CONTROL OPTION

- | | | |
|-----------------------------|---------------|--|
| ☐ DD | DALI DIM | |
| ☐ D1 | 0-10V DIM | |
| ☐ PD | Phase Cut DIM | |
| ☐ D0 | On/Off | |

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
bridging light and life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



OSRAM

size: $\Phi 100 \times 103 \text{mm}$

more information in www.la-luce.it