

## SQUARE DOWNLIGHT




 **2GDL3** è un faretto da incasso a LED con un diffusore in vetro trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.


 **2GDL3** is a recessed LED Downlight with a clear glass diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

### TECHNICAL DATA

|                                             |                                           |
|---------------------------------------------|-------------------------------------------|
| Type                                        | Downlight                                 |
| Installation                                | Recessed                                  |
| Housing                                     | Die-cast Aluminum                         |
| Processing                                  | Powder Coated                             |
| Diffuser                                    | Safety Glass with Special Anti Glare Lens |
| Light Emission Direction                    | Symmetrical                               |
| Glow wire test                              | 850°                                      |
| Safety Class                                | I                                         |
| Direct Mounting on Normal Flammable Surface | Yes                                       |
| Driver Included                             | Remote                                    |
| Adjustable                                  | Fixed/Adjustable                          |

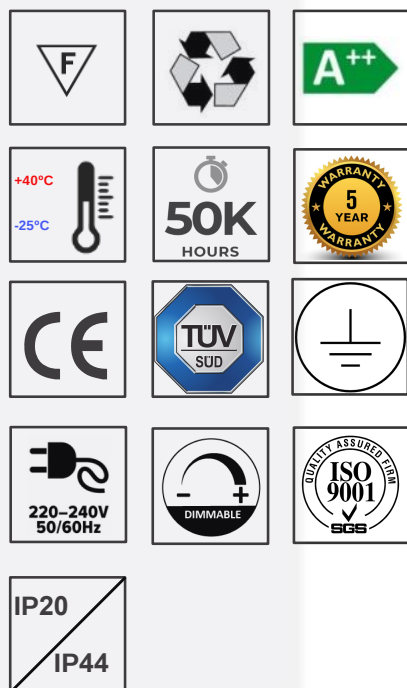

### ORDERING CODE

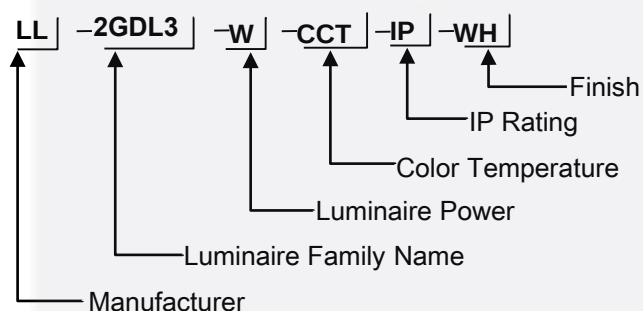

| Code No.                             | System Power (W) | Lumen Output (lm) | Luminaire Efficacy (lm/W) | CRI |
|--------------------------------------|------------------|-------------------|---------------------------|-----|
| <input type="checkbox"/> 2GDL3-2*5W  | 2*5              | 2*500             | 100                       | >90 |
| <input type="checkbox"/> 2GDL3-2*7W  | 2*7              | 2*700             | 100                       | >90 |
| <input type="checkbox"/> 2GDL3-2*9W  | 2*9              | 2*900             | 100                       | >90 |
| <input type="checkbox"/> 2GDL3-2*11W | 2*11             | 2*1100            | 100                       | >90 |
| <input type="checkbox"/> 2GDL3-2*13W | 2*13             | 2*1300            | 100                       | >90 |
| <input type="checkbox"/> 2GDL3-2*15W | 2*15             | 2*1500            | 100                       | >90 |

## COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

## BEAM ANGLE OPTION

☐ 5° ☐ 18° ☐ 24° ☐ 36° ☐ 45° ☐ 60° ☐ 90° ☐ 120° ☐ Diffused



## CONTROL OPTION



- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 ON/OFF




## FINISH OPTION

- ☐ WH- White
- ☐ BR- Black

## PHOTOMETRIC

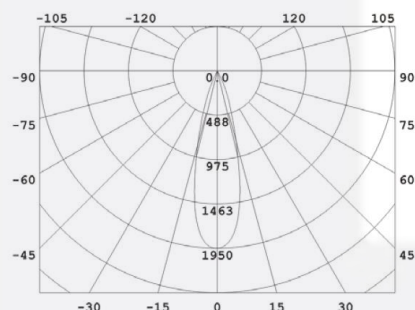

## DIMENSION

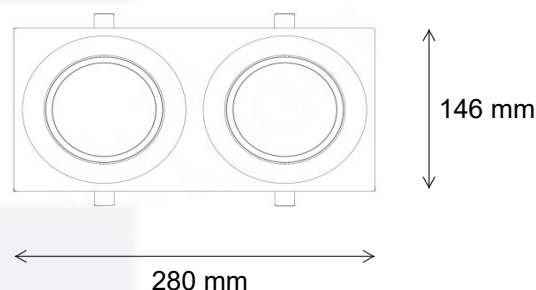

**NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.**

## LED CHIPS

OSRAM

CREE

TRIDONIC

TCLE



Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

## LED DRIVERS



TRIDONIC



laLuce

TCLE

PHILIPS

OSRAM