



WALL LIGHT

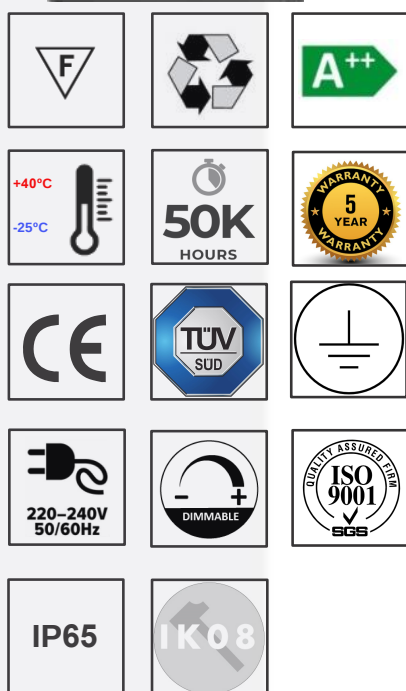

ORDERING CODE

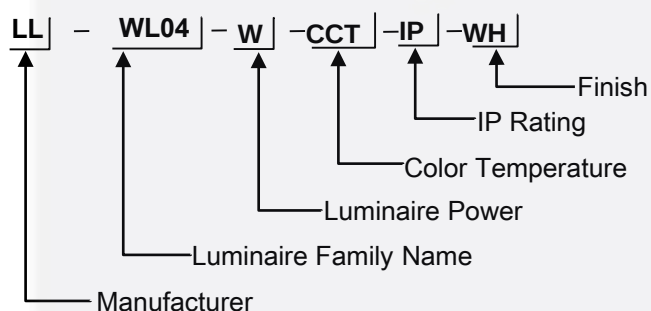

WL04 è un apparecchio di forma quadrata - su e giù - che combina una luce LED brillante con un design semplice. Disposte in modo opposto, le due sorgenti LED generano una direzione verso l'alto e verso il basso con diverse opzioni di dimensioni, potenza, lumen, CRI e CCT.

WL04 is Square shaped - up and down - luminaire combines brilliant LED light with a straightforward design. Oppositely arranged, the two LED sources generate an up-and downwardly directed with different sizes, wattage, lumen, CRI, and CCT options.

TECHNICAL DATA

Type	Wall Mounted
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WL04-4W	2x2	400	100	>90
☐ WL04-6W	2x3	600	100	>90
☐ WL04-8W	2x4	800	100	>90
☐ WL04-12W	2x6	1200	100	>90
☐ WL04-16W	2x8	1600	100	>90
☐ WL04-18W	2x9	1800	100	>90
☐ WL04-20W	2x10	2000	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 18° ☐ 24° ☐ 36° ☐ 45° ☐ 60° ☐ 90° ☐ 120°




CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 ON/OFF



PHOTOMETRIC

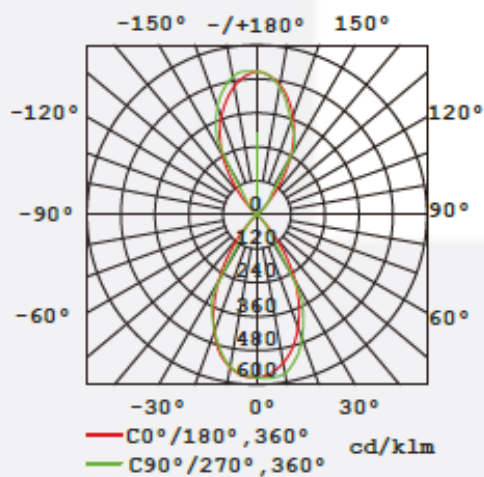

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLE

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLECRISE

HEP
ower for light

laLuce

TCLE


PHILIPS

OSRAM

FINISH OPTION

- ☐ WH- White
- ☐ BR- Black

DIMENSION

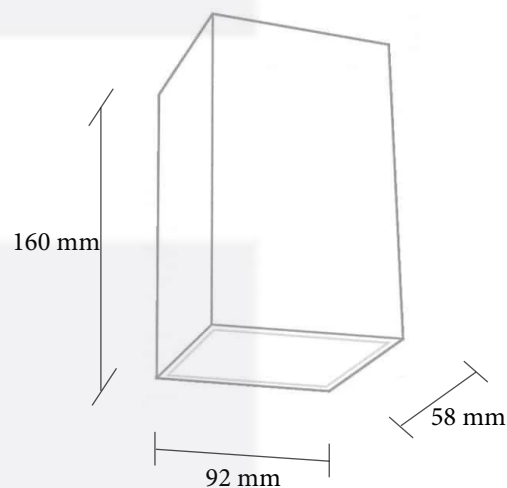

NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.