






### ORDERING CODE

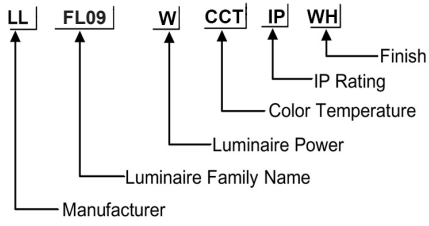

## Specification

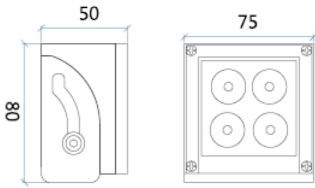

<b>Fixture Material</b>	: Die Cast Aluminium
<b>Fixture Finish</b>	: Powder Coated
<b>Diffuser</b>	: Tempered Glass
<b>Cowl Material</b>	: Die Cast Aluminium
<b>LED Chip</b>	: CREE
<b>Binning</b>	: 3 step MacAdam
<b>Wiring</b>	: 3x1.0 50cm cable with antisiphon plug
<b>Lifespan</b>	: 50.000 Hrs
<b>CRI</b>	: >80
<b>Input Voltage</b>	: 12V AC, 50/60Hz or 220-240V AC, 50/60Hz
<b>Operating Temperature</b>	: -20°C to 55°C
<b>Warranty</b>	: 5 Years against manufacturing defects



Power (W)	Lumen Lm	IP Rating	Beam Angle	Available CCT
4W	400Lm	66	10°/15°/30°/45°	2700K
8W	800Lm			3000K
10W	1000Lm			4000K
12W	1200Lm			6000K

