laLuce

## ORDERING CODE

LL | PL45R | W | CCT | IP | WH

- WH — Finish
- IP — IP Rating
- CCT — Color Temperature
- W — Luminaire Power
- PL45R — Luminaire Family Name
- LL — Manufacturer

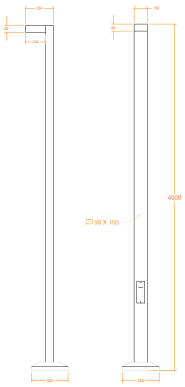

## Specification

| | |
|---|---|
| Fixture Material | : Die-cast aluminum |
| Pole Material | : Aluminum Steel |
| Fixture Finish | : Powder Coated |
| Diffuser | : Safety Glass/Polycarboante |
| LED Chip | : CREE |
| Binning | : 3 step MacAdam |
| Lifespan | : 50,000 Hrs |
| CRI | : >70 / >80 / >90 |
| Input Voltage | : 220V / 240V, 50/60Hz |
| Operating Temperature | : -35°C to +55°C |
| Warranty | : 5 Years against manufacturing defects |

CE IP65 TÜV CREE OSRAM LUMILEDS

| Power (W) | Lumen Lm >90 | IP Rating | Beam Angle | Available CCT |
|---|---|---|---|---|
| 10W | 1100Lm | IP65 | 15° / 23° / 36° / 60° / 90° | 2700K |
| 20W | 2200Lm | | | 3000K |
| 40W | 4400Lm | | | 4000K |
| 60W | 6600Lm | | | 6000K |

| BEAM | FINISH | COLOR |
|---|---|---|
| CUSTOM | CUSTOM | CUSTOM |