

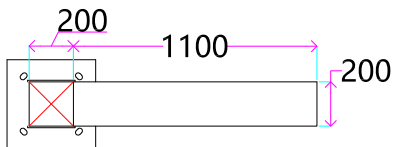

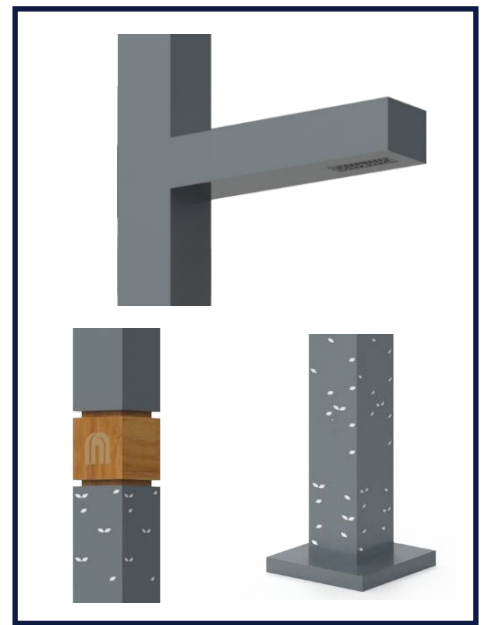


ORDERING CODE

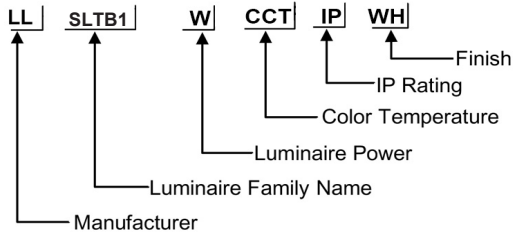

TOP VIEW



BOTTOM VIEW

Specification

Fixture Material	: Die-cast ALuminum
Pole Material	: Aluminum Steel
Fixture Finish	: Powder Coated
Diffuser	: Safety Glass
LED Chip	: CREE
Binning	: 3 step MacAdam
Lifespan	: 50,000 Hrs
CRI	: >70 / >80 / >90
Input Voltage	: 220V / 240V, 50/60Hz
Operating Temperature	: -20°C to +70°C
Warranty	: 5 Years against manufacturing defects



Power (W)	Lumen Lm	IP Rating	Beam Angle	Available CCT
30W	4350Lm	IP65	T I / T II / T III / T IV / T V	2700K
50W	7250Lm			3000K
65W	9425Lm			4000K
75W	10875Lm			6000K

