



## DOWNLIGHT




 **NIC M** Faretto da incasso LED professionale ad alto grado di protezione IP (IP 65) ideale per ambienti ad alto tasso di umidità come aree aperte, centri commerciali, uso navale, bagni, saune, centri SPA. diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

 **NIC M** Professional recessed LED downlight with high IP grade protection (IP 65) ideal for environments with a high rate of humidity such as open areas, shopping centers, naval use, bathrooms, saunas, SPA centers. different diameters, wattage, lumen, beam angle, CRI, and CCT option.


### TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die cast Aluminum
Diffuser	Safety Glass with Anti-Galre Lens
Light Emission Direction	Asymmetric
Glow Wire Test	850°
Safety Class	II
Driver	On/Off
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote driver required
Adjustable	No

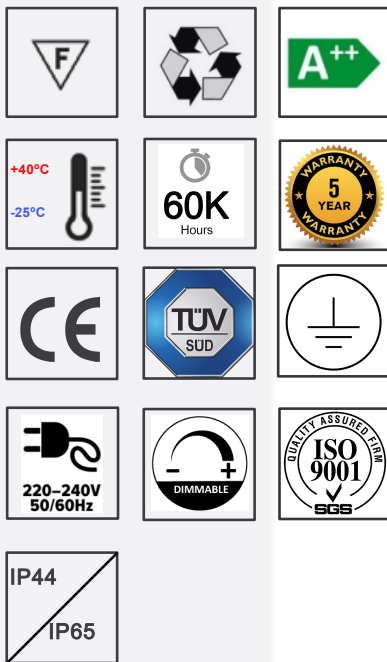

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> NIC M-6W	6	804	134	>90
<input type="checkbox"/> NIC M-7W	7	940	134	>90
<input type="checkbox"/> NIC M-10W	10	1340	134	>90
<input type="checkbox"/> NIC M-11W	11	1474	134	>90
<input type="checkbox"/> NIC M-15W	15	2010	134	>90

### MODEL CODE

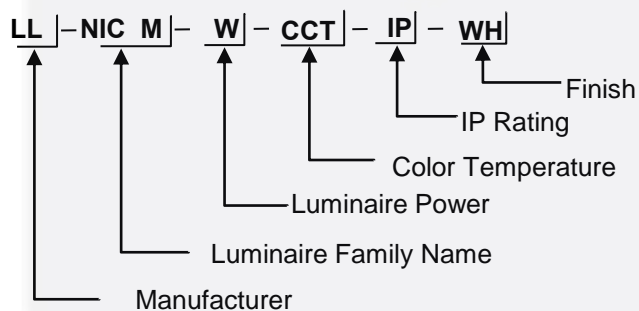

## COLOR TEMPERATURE OPTION



2700K 
  3000K 
  4000K 
  5000K 
  6000K

## BEAM ANGLE OPTION

18° 
  33° 
  36° 
  37° 
  46° 
  60° 
  90° 
  120° 
  Diffused



## CONTROL OPTION

- DD DALI DIM
- D1 0-10V DIM
- PD Phase Cut DIM
- D0 On/Off



## LED CHIPS

OSRAM

CREE

TRIDONIC

TCLEB  
professional led applications



Panasonic

bridgelux  
BRIDGING LIGHT AND LIFE™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

## LED DRIVERS



TRIDONIC



laLuce

TCLEB  
professional led applications


PHILIPS

OSRAM

## FINISH OPTION

- WH- White
- BR- Black

## PHOTOMETRIC

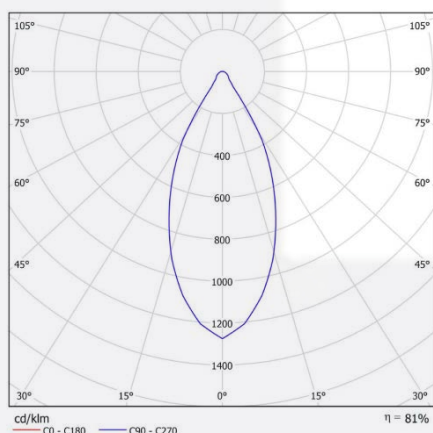

## DIMENSION



D 82 \* H 82 mm