

# LINEAR LIGHT



**LNNW1** L'apparecchio lineare a superficie diffusa ha un aspetto minimalista, enfatizza i dettagli architettonici in modo discreto, offre un'emissione di luce diffusa e omogenea senza ombre con diverse opzioni di lunghezza, potenza, lumen, angolo del fascio, CRI e CCT.

**LNNW1** Diffused surface linear luminaire has a minimalist appearance emphasizes architectural details in a discreet way, offers a diffused and homogeneous light emission without shadows with different length, wattage, lumen, beam angle, CRI, and CCT option


## TECHNICAL DATA

Type	Linear Light
Installation	Floor Recessed
Housing	Anodized Aluminum
Processing	Powder Coated
Diffuser	Opal PMMA
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed



IP67

### ORDERING CODE

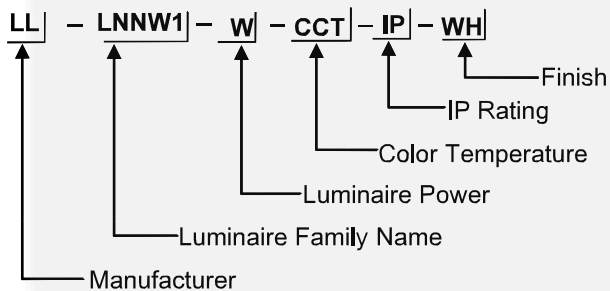

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> LNNW1-6W	6	600	100	>90
<input type="checkbox"/> LNNW1-10W	10	1000	100	>90
<input type="checkbox"/> LNNW1-20W	20	2000	100	>90
<input type="checkbox"/> LNNW1-30W	30	3000	100	>90
<input type="checkbox"/> LNNW1-36W	36	3600	100	>90
<input type="checkbox"/> LNNW1-40W	40	4000	100	>90

## COLOR TEMPERATURE OPTION



2700K  3000K  4000K  5000K  6000K

## BEAM ANGLE OPTION

90°  120°  Diffused  Asymmetric



## CONTROL OPTION

- DD DALI DIM
- D1 0-10V DIM
- PD Phase Cut DIM
- D0 ON/OFF



## LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

## LED DRIVERS

MW MEAN WELL

TRIDONIC

laLuce

TCI LED

EAGLE RISE

PHILIPS


HEP over for light

OSRAM

## FINISH OPTION


- WH-White
- GR-Grey

## PHOTOMETRIC

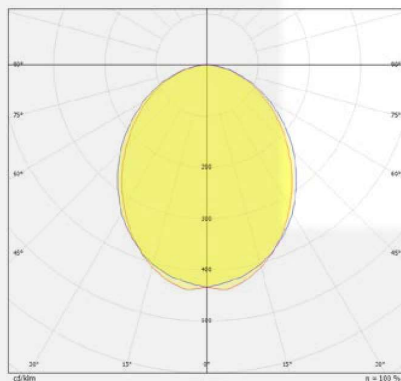

## DIMENSION

300 / 500 / 1000 / 1200 mm



NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.