


UP LIGHT

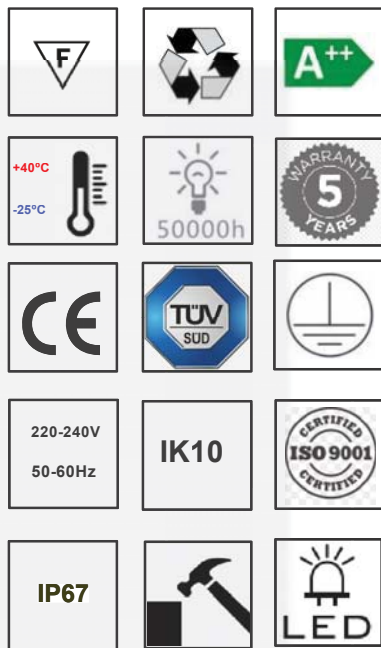

UND135 è un apparecchio da incasso a LED da incasso a pavimento compatto carrabile e calpestabile a LED progettato per la segnalazione di strade, piste ciclabili, percorsi pedonali e illuminazione di facciate. con diversi diametri, potenza, lumen, angolo del fascio, opzione CRI e CCT.


UND135 is a recessed LED in-ground Compact walk over in-ground recessed LED luminaire designed for the signalization of streets, cycle lanes, and pedestrian ways and facade lighting. with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

TECHNICAL DATA

Type	In-ground Up-light
Installation	Recessed
Housing	Die-cast Aluminum with Stainless Steel 316
Processing	Powder Coated
Diffuser	Safety Glass with Anti - Glare Special Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	+/- 25°
Gland	IP68 PVC

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> UND135-4W	4	400	100	>90
<input type="checkbox"/> UND135-6W	6	600	100	>90
<input type="checkbox"/> UND135-8W	8	800	100	>90
<input type="checkbox"/> UND135-10W	10	1000	100	>90

ORDERING CODE

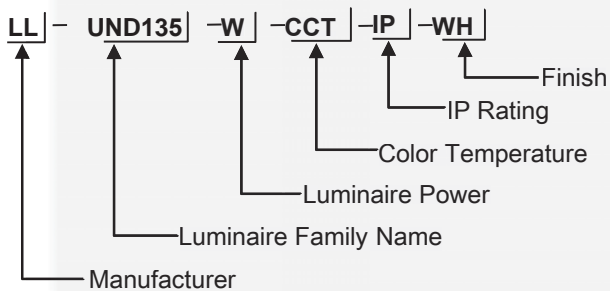

COLOR TEMPERATURE OPTION



2700K
 3000K
 4000K
 5000K
 6000K

BEAM ANGLE OPTION

5°
 15°
 24°
 36°
 45°
 60°
 90°
 120°
 Diffused



LED CHIPS

OSRAM

SEOUL

NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED
professional led applications

bridgelux
Bringing Light and Life™

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLE RISE

HEP
power for light™

laLuce

TCI LED

PHILIPS

OSRAM

CONTROL OPTION



- DD DALI DIM
- D1 0-10V DIM
- PD Phase Cut DIM
- D0 ON/OFF



FINISH OPTION

- SS- Stainless Steel

PHOTOMETRIC



DIMENSION



NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.