

## SPIKE / PROJECTOR LIGHT




**LOUSA** is perfect for highlighting features on buildings or in flagpole. High power LED light source for the waterproofed, powerful, versatile spotlight, mounted on ground spike. Its compact size makes this light fitting ideally suited to any number of applications.


**LOUSA** è perfetto per evidenziare le caratteristiche degli edifici o nell'asta della bandiera. Sorgente luminosa a LED ad alta potenza per faretto impermeabile, potente e versatile, montato su picchetto da terra. Le sue dimensioni compatte rendono questo apparecchio di illuminazione ideale per qualsiasi numero di applicazioni.

### TECHNICAL DATA


Type	Flood Light
Installation	Surface
Housing	Die-cast aluminium
Processing	Powder Coated
Diffuser	Tempered Safety Glass
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	Yes

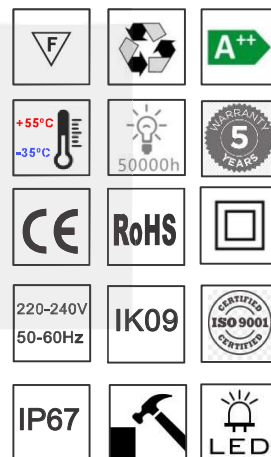

## ORDERING CODE

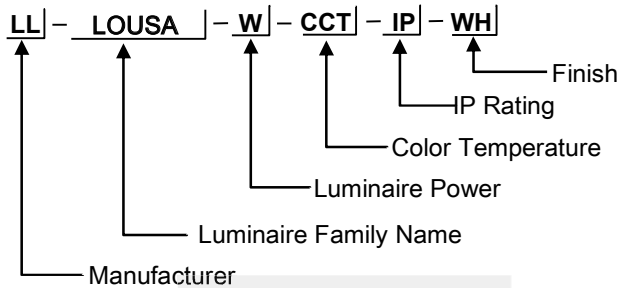

## COLOR TEMPERATURE OPTION

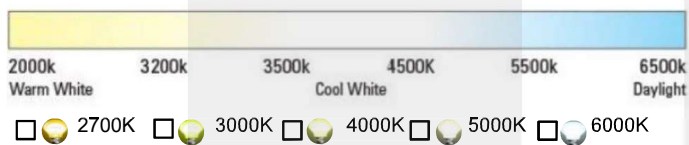

## BEAM ANGLE OPTION



## FINISH OPTION



## CONTROL OPTION

- DD DALI DIM
- D1 0-10V DIM
- PD Phase Cut DIM

## LED CHIPS



Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> LOUSA -2W	2	200	100	>90
<input type="checkbox"/> LOUSA -4W	4	400	100	>90
<input type="checkbox"/> LOUSA -6W	6	600	100	>90
<input type="checkbox"/> LOUSA -8W	8	800	100	>90
<input type="checkbox"/> LOUSA -10W	10	1000	100	>90
<input type="checkbox"/> LOUSA -12W	12	1200	100	>90
<input type="checkbox"/> LOUSA -14W	14	1400	100	>90
<input type="checkbox"/> LOUSA -15W	15	1500	100	>90
<input type="checkbox"/> LOUSA -16W	16	1600	100	>90
<input type="checkbox"/> LOUSA -18W	18	1800	100	>90
<input type="checkbox"/> LOUSA -20W	20	2000	100	>90
<input type="checkbox"/> LOUSA -22W	22	2200	100	>90
<input type="checkbox"/> LOUSA -23W	23	2300	100	>90
<input type="checkbox"/> LOUSA -24W	24	2400	100	>90
<input type="checkbox"/> LOUSA -26W	26	2600	100	>90

## LED DRIVERS



TRIDONIC



DONE





PHILIPS



Helvar

OSRAM

## PHOTOMETRIC



## 3D MODULE



45° Cylindrical Screen



Honeycomb Louvre



Spike for Ground Installation