

SQUARE SPOTLIGHT




 **SLS14AD** è un faretto LED da incasso con un diffusore in vetro trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

 **SLS14AD** is a recessed LED Spotlight with a clear glass diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.


TECHNICAL DATA

Type	Spotlight
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass/PMMA
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed/Adjustable

	System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 3	3	345	115	>90
☐ 6	6	690	115	>90
☐ 8	8	920	115	>90
☐ 10	10	1250	115	>90
☐ 12	12	1380	115	>90
☐ 14	14	1610	115	>90
☐ 17	17	1955	115	>90

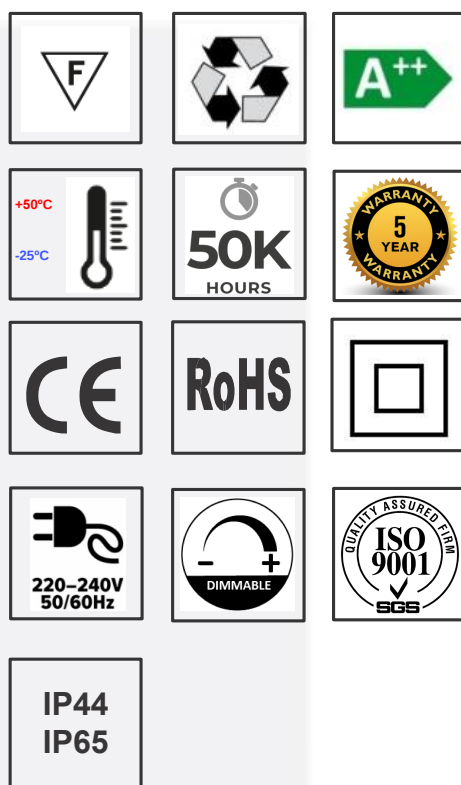

ORDERING CODE

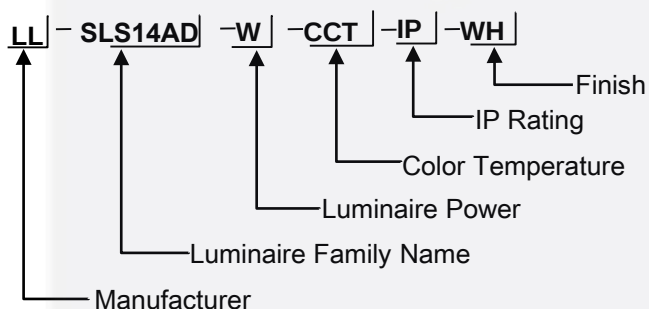

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 18° ☐ 24° ☐ 36° ☐ 45° ☐ 60° ☐ 90° ☐ 120° ☐ Diffused




CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 ON/OFF



PHOTOMETRIC

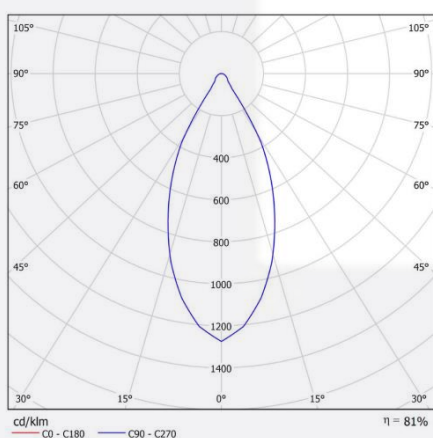

NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLE



Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS



TRIDONIC



PHILIPS

OSRAM

FINISH OPTION

- ☐ WH- White
- ☐ BR- Black

DIMENSION

