

SURFACE SQUARE DOWNLIGHT




 **SIM03** is a surface Ceiling-mounted luminaire wire to the base with a pluggable connection for easy installation of different wattage, lumen, beam angle, CRI, and CCT option.


 **SIM03** è un apparecchio per montaggio a soffitto di superficie, cavo alla base con una connessione a innesto per una facile installazione di diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Square Downlight
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Tempered Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

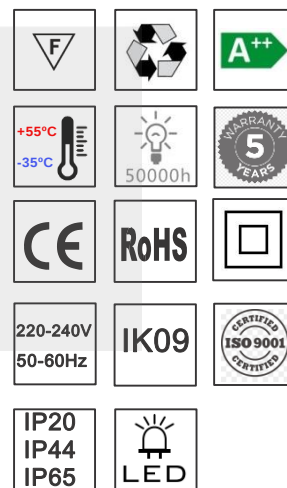

ORDERING CODE

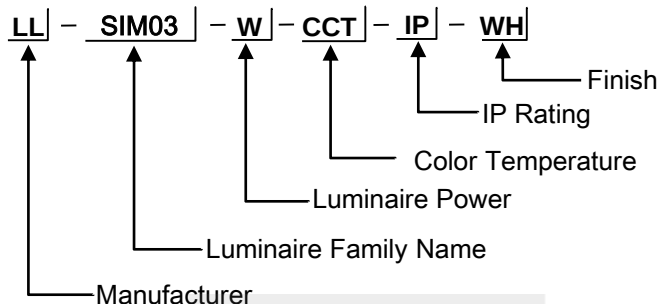

	Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐	SIM03	6	600	100	>90
☐	SIM03	8	800	100	>90
☐	SIM03	9	900	100	>90
☐	SIM03	10	1000	100	>90
☐	SIM03	12	1200	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 15° ☐ 24° ☐ 36° ☐ 47° ☐ 60° ☐ DIFFUSED ☐ ELLIPTICAL

FINISH OPTION

☐ SS-Stainless Steel ☐ AL-Aluminum ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM 

☐ D1 0-10V DIM 

☐ PD Phase Cut DIM 

☐ D0 On. Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

LED DRIVERS



TRIDONIC



DONE



TCI^{LED}
professional led applications


PHILIPS

HEP^{ower for light}

Helvar

OSRAM

PHOTOMETRIC

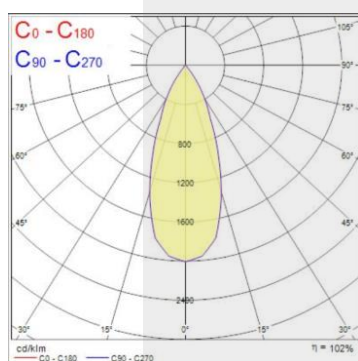

DIMENSION



97x97

Unit: mm