laLuce

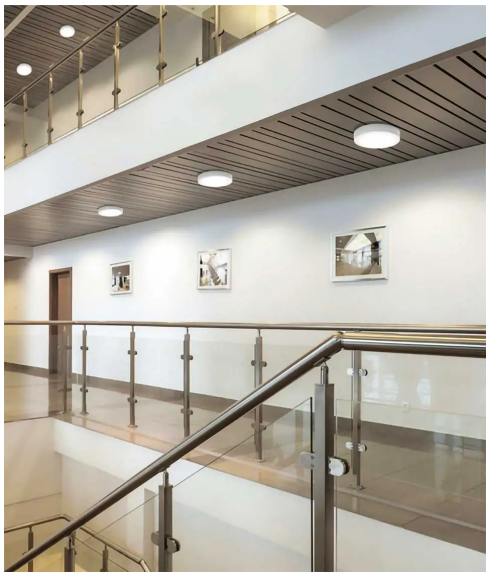

ORDERING CODE

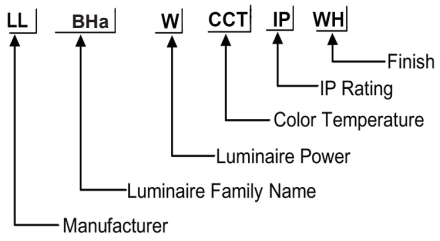



Ø275

80

Specification

Fixture Material	:	Die Cast Aluminium
Fixture Finish	:	Powder Coated
Diffuser	:	Opal Polycarbonate
LED Chip	:	CREE
Binning	:	3 step MacAdam
Lifespan	:	50,000Hrs
CRI	:	>90
Input Voltage	:	220-240V AC, 50/60Hz
Operating Temperature	:	-35°C to +55°C
Warranty	:	5 Years against manufacturing defects

CE IP65 TÜV CREE DIMMABLE

Power (W)	Lumen Lm	IP Rating	Beam Angle	Available CCT
10 W	1000Lm	IP65	Diffused	2700K
12W	1200Lm			3000K
15 W	1500Lm			4000K
18 W	1800Lm			5000K
20 W	2000Lm			6000K

BEAM	FINISH	COLOR
CUSTOM	CUSTOM	CUSTOM