

WALL LIGHT




 **WL08** è un apparecchio rotondo di forma rotonda - su e giù - combina una brillante luce LED con un design semplice. Disposte in modo opposto, le due sorgenti LED generano una direzione verso l'alto e verso il basso con diverse dimensioni, potenza, lumen, CRI e opzioni .CCT


 **WL08** is round shaped - up and down - luminaire combines brilliant LED light with a straightforward design. Oppositely arranged, the two LED sources generate an up-and downwardly directed with .different sizes, wattage, lumen, CRI, and CCT options

TECHNICAL DATA

Type	Wall Mounted
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed/Adjustable

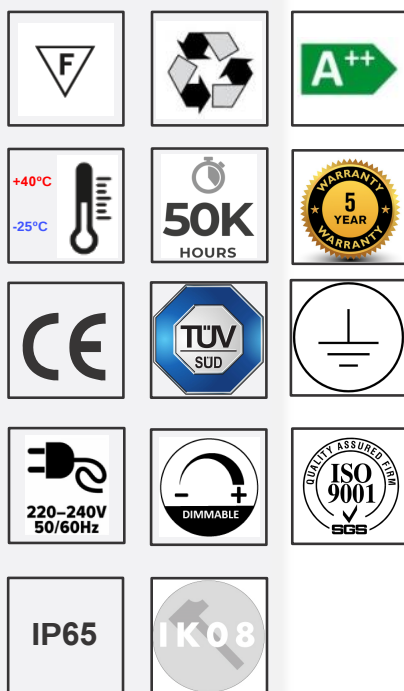

ORDERING CODE

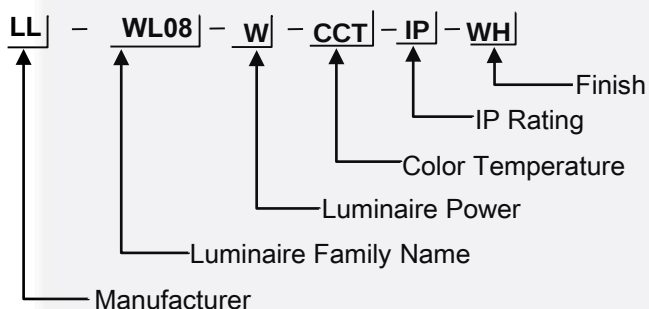

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WL08-4W	2x2	400	100	>90
☐ WL08-6W	2x3	600	100	>90
☐ WL08-8W	2x4	800	100	>90
☐ WL08-12W	2x6	1200	100	>90
☐ WL08-16W	2x8	1600	100	>90
☐ WL08-18W	2x9	1800	100	>90
☐ WL08-20W	2x10	2000	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 18° ☐ 24° ☐ 36° ☐ 45° ☐ 60° ☐ 90° ☐ 120°




CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 ON/OFF



PHOTOMETRIC

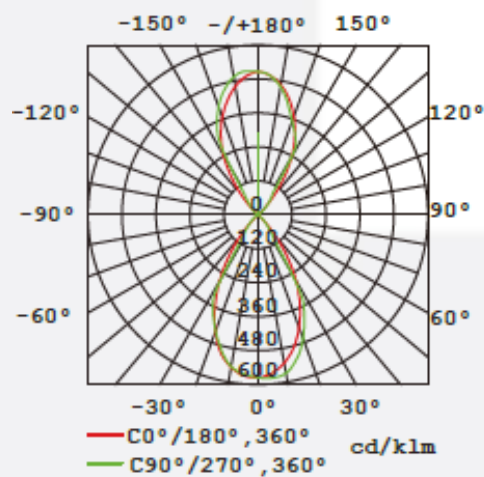

NOTE: LED CHIPS & LED DRIVERS as per manufacturer's recommendations.

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLE



Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS



TRIDONIC



laLuce

TCLE

PHILIPS

OSRAM

FINISH OPTION

- ☐ WH- White
- ☐ BR- Black

DIMENSION

